


RBin 2.0 instalation manual



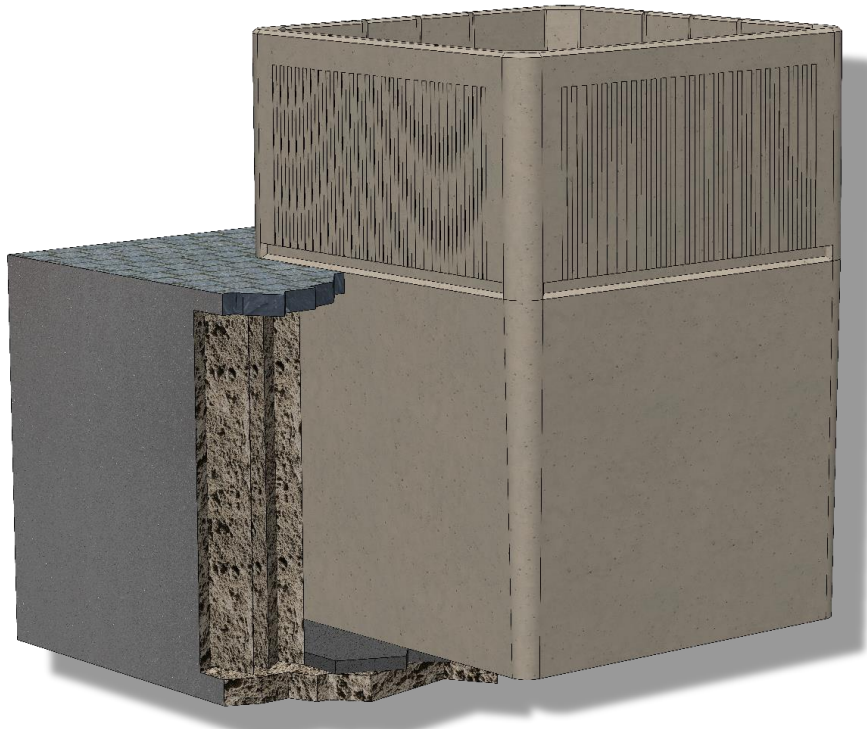

1,5 meter 4 point lifting chain.

Min. 6000 Kg.



4 Lifting Loops M16 thread

(1200 Kg)



Level



Stabilised sand




safety equipment



Crane min. 5000 Kg.

- The depth of the pit is determined by the final finish.
- The pit should be installed min. 88 cm **above** ground level.

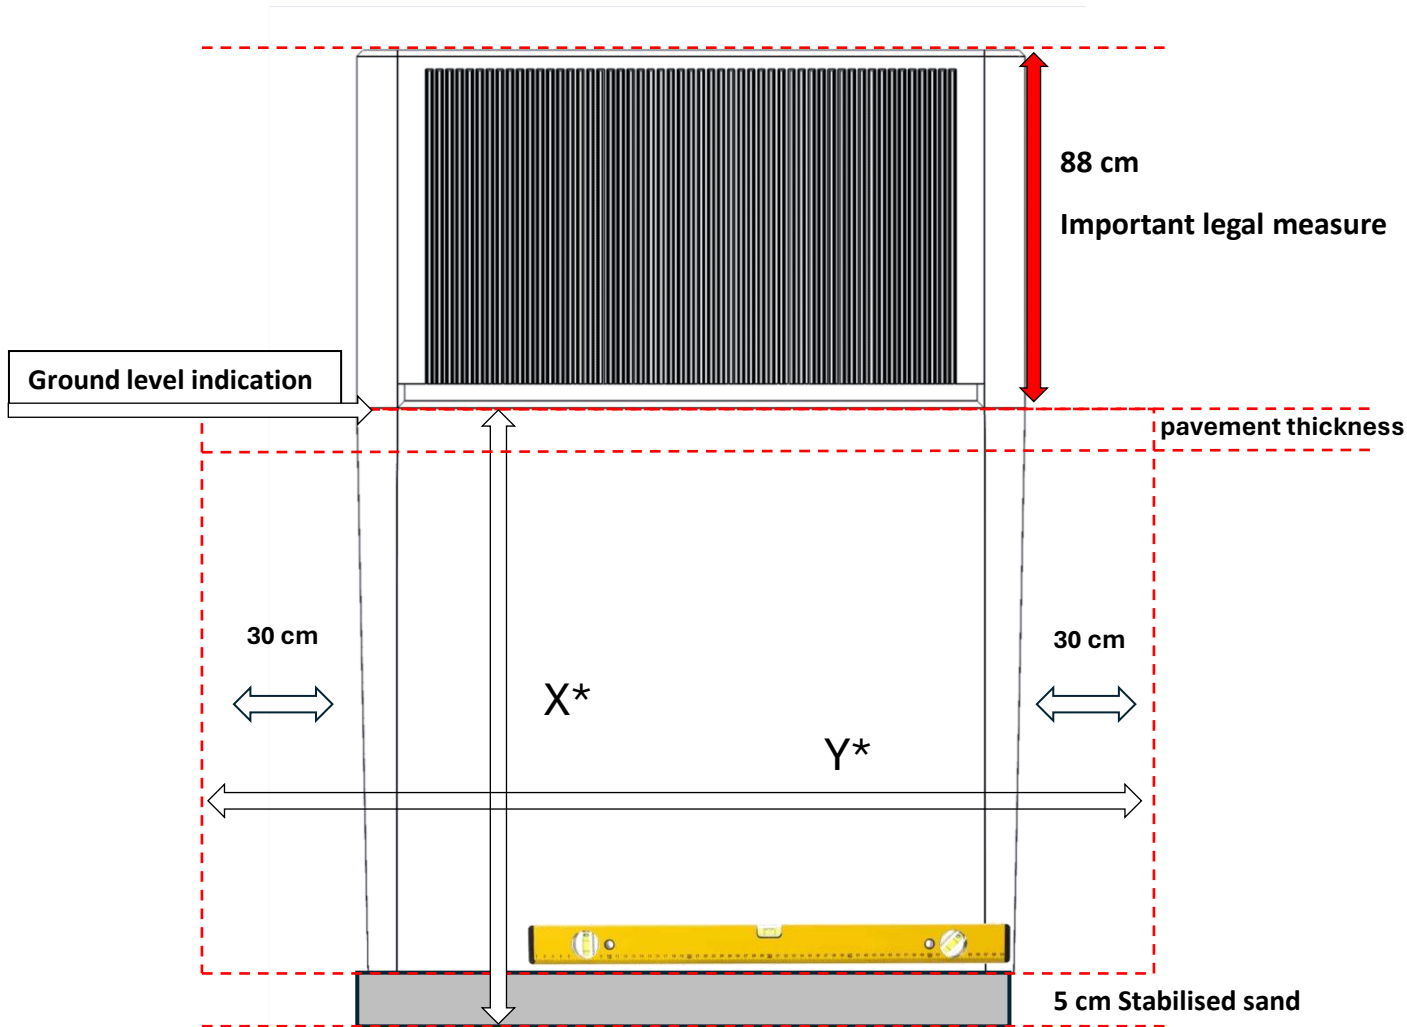

* X = 1,45 meter + pavement thickness.

* Y = 2,26 meter x 2,26 meter

- Mount the 4 lifting loops in the 4 corners.
- Install the RBin using the 4 corner chain in the pit.
- Level the RBin.

